

FIG 1

Figure 2 is a perspective view of the device 10 in a closed position. The device 10 includes a base 12, a handle 14, a trigger 16, a spring 18, a plunger 20, a piston 22, a cylinder 24, a valve 26, a nozzle 28, a chamber 30, a port 32, and a seal 34.




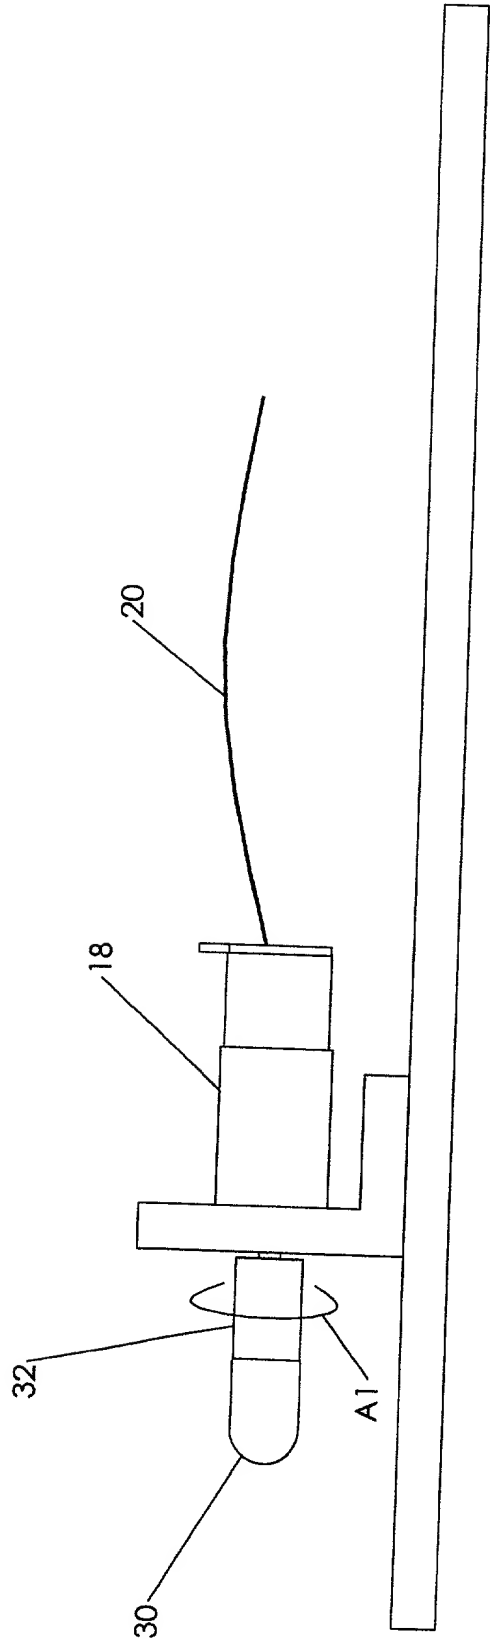


FIG 2

Bullet A

Bullet B

Composite
A - Left B - Right

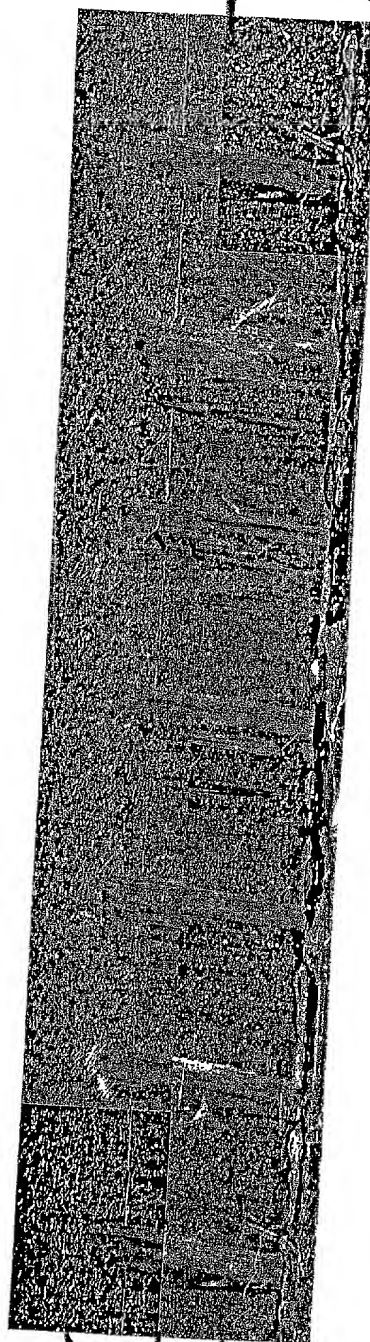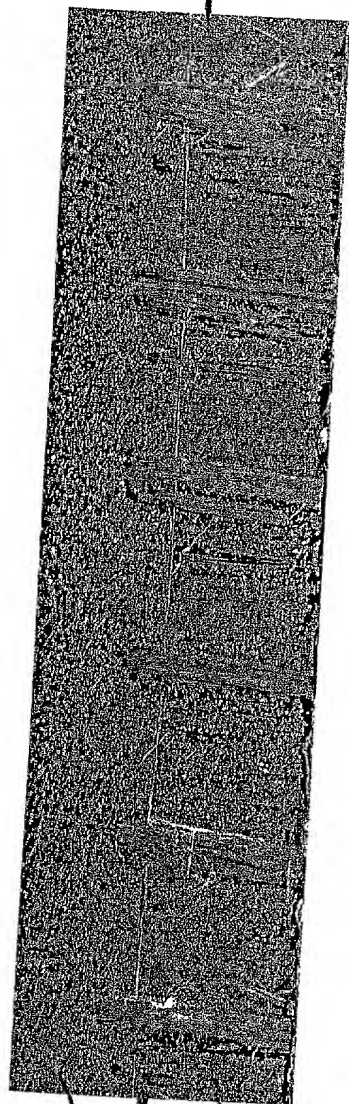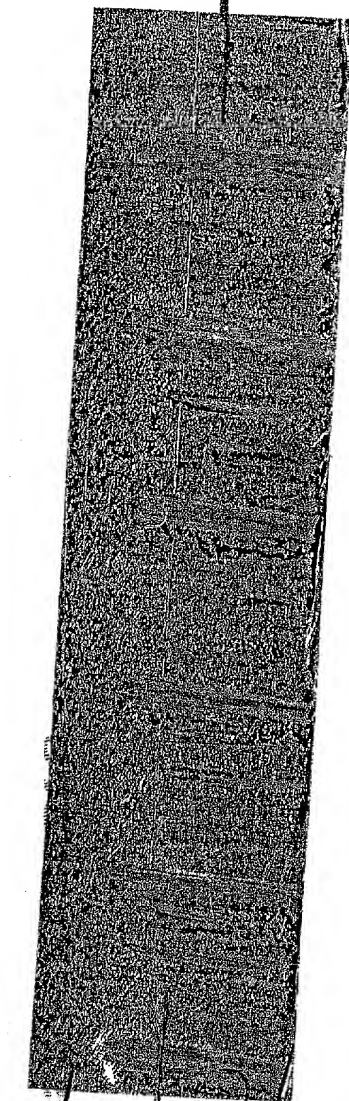

38
40
34

42
44
36

38
44
46

FIG 3



138

BULLET A LEFT HALF

138

BULLET B RIGHT HALF

46



15

BULLET A RIGHT HALF

12

BULLET B LEFT HALF

48

FIG 4